

Searching optimal shapes for blades of a fan

Gianluca Argentini

gianluca.argentini@riellogroup.com

gianluca.argentini@gmail.com

Research & Development Department

Riello Burners, 37045 San Pietro di Legnago (Verona), Italy

March 2008

Abstract

A nonlinear differential equation about optimal shapes for blades of a fan. A boundary value differential problem from engineering, geometrical or physical bonds. A relation between linear profiles and constant speed along the side under flow.

Keywords: centrifugal fan, blade, differential equation.

1 The differential equation

Consider the 2D axial projection of a centrifugal forward fan ([1]). Air is sucked from a central zone and channeled between two blades. Then, centrifugal force put it towards the external zone of the fan. From the point of view of a single blade, air flow reaches its geometrical basis and go through the blades channel. In this work the fundamental hypothesis is that *the flow field is tangent to the profile of a blade at its initial point*.

It can be shown that this condition is suitable in the case of noise reduction. But what about the profile of the blade, in the case of geometrical or engineering bonds?

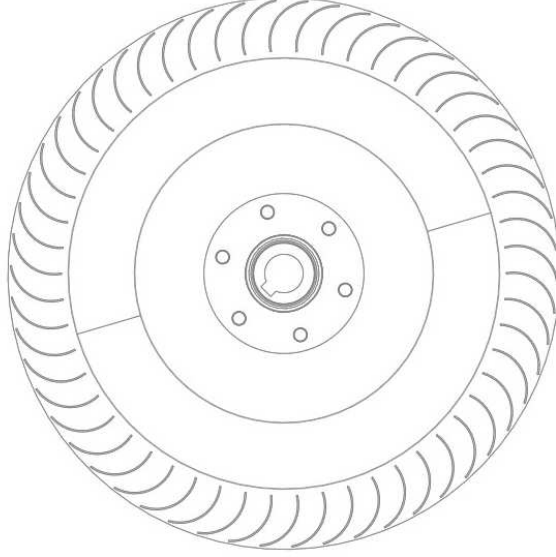


Figure 1: *A forward fan's impeller: the concave side of the blades receives the fluid flow.*

Let $\{X, Y\}$ a cartesian system local to a blade, with Y -axis containing the blade's initial geometrical point (see Fig.2). Assume that the blade's profile is the graphic of a smooth function $X = F(Y)$. Also we assume that *the flow velocity field is tangent along the concave side*, that is we neglect physical effects as boundary layer or flow separation ([2]). Then, the acceleration along the blade's side is the sum of the tangential and the centripetal accelerations, that is (see [3])

$$\mathbf{a}_t = \dot{v} (\sin\alpha, \cos\alpha), \quad \mathbf{a}_c = \frac{v^2}{r_c} (\cos\alpha, \sin\alpha) \quad (1)$$

where v is the local speed in the $\{X, Y\}$ system, $v^2 = \dot{X}^2 + \dot{Y}^2$, and r_c is the radius of curvature:

$$r_c = \frac{(1 + F_Y^2)^{\frac{3}{2}}}{|F_{YY}|} \quad (2)$$

Note that we consider $\alpha \geq 0$ if $F_Y \leq 0$, negative otherwise. Then the X -component of the total local acceleration is

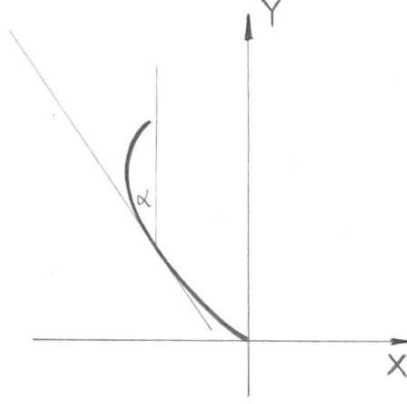


Figure 2: *The reference cartesian system local to the blade.*

$$\ddot{X} = \dot{v} \sin \alpha + \frac{v^2}{r_c} \cos \alpha \quad (3)$$

Now we try to write previous equation using only Y and its derivatives. First of all, as $X(t) = F(Y(t))$, by chain rule we have

$$\dot{X} = F_Y \dot{Y} \quad (4)$$

$$\ddot{X} = F_{YY} \dot{Y}^2 + F_Y \ddot{Y} \quad (5)$$

so that

$$v^2 = \dot{X}^2 + \dot{Y}^2 = (1 + F_Y^2) \dot{Y}^2 \quad (6)$$

and

$$2 v \dot{v} = 2 F_Y F_{YY} \dot{Y}^3 + 2(1 + F_Y^2) \dot{Y} \ddot{Y} \quad (7)$$

Also, note that $\tan \alpha = -F_Y$, so using usual trigonometric formulas we can write

$$\sin \alpha = \frac{\tan \alpha}{\sqrt{1 + \tan^2 \alpha}} = -\frac{F_Y}{\sqrt{1 + F_Y^2}} \quad (8)$$

$$\cos\alpha = \frac{1}{\sqrt{1 + tg^2\alpha}} = \frac{1}{\sqrt{1 + F_Y^2}}$$

With all these previous identities and the assumption $F_{YY} > 0$, after some simplifications equation (3) becomes

$$F_Y(1 + F_Y^2)\ddot{Y} + F_Y^2 F_{YY}\dot{Y}^2 = 0 \quad (9)$$

In the points of the blade where $F_Y = 0$ this equation is banally satisfied, so we can say that in the points where F_Y is not null the blade equation is

$$(1 + F_Y^2)\ddot{Y} + F_Y F_{YY}\dot{Y}^2 = 0 \quad (10)$$

Previous is a nonlinear differential equation that can be used in two manners: if one assigns the blade profile, that is the function $F(Y)$, then by (10) it can be computed the law motion $Y = Y(t)$ along the blade side; if one wants to assigne a particular motion $Y(t)$, then it can compute the blade profiles $F(Y)$ which satisfy that law.

2 A differential problem

Suppose that engineering project or physical bonds require a particular law motion $Y = Y(t)$ such that $\dot{Y} = g(Y)$. Then $\ddot{Y} = g_Y(Y)g(Y)$. Note that, for our geometrical assumptions, we have a boundary condition $F(b) = 0$, where $(0, b)$ are the cartesian coordinates of the blade's initial point. Also, from physical assumptions about the tangential flow at blade's initial point, we have a boundary condition on the derivative: $F_Y(b) = m_0$, being m_0 the slope of the flow field at impeller inlet. Then the blade profile is determined by the differential problem

$$\begin{cases} g_Y(Y)g(Y)(1 + F_Y^2) + g^2(Y)F_Y F_{YY} = 0 \\ F(b) = 0 \\ F_Y(b) = m_0 \end{cases} \quad (11)$$

A first simple but useful consideration is the following. Suppose to have blades with a null curvature, that is $F_{YY} = 0$ for every Y . Then, from (11) follows

$$g_Y(Y)g(Y)(1 + F_Y^2) = 0 \quad (12)$$

Therefore $g_Y = 0$ for every Y , that is $Y(t) = at + b$ being $\ddot{Y} = 0$. Vice versa, if $Y(t)$ is linear on t variable, then $g_Y = 0$ for every Y , and the differential equation becomes

$$g^2(Y)F_Y F_{YY} = 0 \tag{13}$$

which gives $F_{YY} = 0$. Note that, in this case, from (4) follows that $X(t)$ is linear too. Therefore, *the only profiles with constant speed along the downwind side are linear blades.*

References

- [1] F.Bleier, *Fan handbook*, 3rd ed., McGraw-Hill, New York, 1998
- [2] H.Rouse, *Fluid Mechanics for Hydraulic Engineers*, Dover, New York, 1961
- [3] R.Courant, *Differential and Integral Calculus*, Vol. 2, Wiley, New York, 1988